

**EB-150FHD-TR**  
**HDMI 150m Extender**  
**over Cat5e/Cat6**



***VitBest***<sup>®</sup>

User Manual

**VER: 1.0**

## Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## Surge protection device recommended


This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

## Table of Contents

1. Introduction.....	3
2. Features.....	3
3. Package Contents.....	3
4. Specifications.....	4
5. Operation Controls and Functions.....	5
5.1 Transmitter Panel.....	5
5.2 Receiver Panel.....	7
6. Connection Diagram.....	10


## Caution

The extender need to follow direct interconnection method CAT cable.



**Direct interconnection method**

The extender will go into protection mode automatically and no video out when using cross interconnection method CAT cable.



**Cross interconnection method**

## 1. Introduction

The HDMI Extender can extend HDMI signal over 500 feet/150 meters to an HDMI compatible display via single Cat5e/6 cable. It also supports bi-directional Infrared control signal and RS-232 transmission together with HDMI signal, it can allow you to easily control your DVD player at TV side or control your TV at the DVD player side when using this extender.

## 2. Features

- ☆ HDMI 1.4, HDCP 1.4 and DVI compliant
- ☆ Video resolutions up to 1080p@60Hz (YUV4:4:4)
- ☆ HDMI High Bit Rate(HBR) audio pass through
- ☆ 150 meters transmission distance over CAT6 cable
- ☆ POC (Power over Cable), either TX or RX is powered by one 24V@1A power supply
- ※ See the description 1
- ☆ Bi-directional infrared control signal transmission
- ※ See the description 2
- ☆ Bi-directional RS-232 signal transmission
- ※ See the description 3

## 3. Package Contents

- ① 1x HDMI Extender Transmitter
- ② 1x HDMI Extender Receiver
- ③ 1x Wideband IR emitter cable
- ④ 1x Wideband IR Receiver cable
- ⑤ 1x 24V/1A Power Adaptor
- ⑥ 1x User Manual

## 4.Specifications


<b>Technical</b>	
HDMI Compliance	HDMI 1.4
HDCP Compliance	HDCP 1.4
Video Bandwidth	225MHz
Video Resolutions	up to1080P @60Hz YUV4:4:4、 RGB4:4:4
Color Space	RGB, YUV4:4:4, YUV 4:2:2
Color Depth	8-bit
HDMI Audio Formats (Pass-through)	LPCM 2/5.1/7.1CH, Dolby Digital, DTS 5.1, Dolby Digital+, Dolby True HD, DTS-HD Master Audio, Dolby Atmos, DTS:X
ESD Protection	Human body model — ±8kV (air-gap discharge) & ±4kV (contact discharge)
<b>Connections</b>	
Inputs	Transmitter: 1x HDMI Type A [19-pin female] 1x IR INPUT [3.5mm Stereo Mini-jack] 1x RS232 [Phoenix jack] Receiver: 1x HD BaseT In [RJ45] 1x IR INPUT [3.5mm Stereo Mini-jack] 1x RS232 [Phoenix jack]
Outputs	Transmitter: 1x HD BaseT Out [RJ45] 1x IR OUTPUT [3.5mm Stereo Mini-jack] Receiver: 1x HDMI Type A [19-pin female] 1x IR OUTPUT [3.5mm Stereo Mini-jack]

## Mechanical

Housing	Metal Enclosure
Color	Black
Dimensions	115mm [W] x 64.7mm [D] x 17mm [H]
Weight	406g
Power Supply	Input: AC100 - 240V 50/60Hz, Output: DC 24V/1A (US/EU standards, CE/FCC/UL certified)
Power Consumption	5.76W
Operation Temperature	32 - 104°F / 0 - 40°C
Storage temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (no condensation)


## 5.Operation Controls and Functions

### 5.1 Transmitter Panel

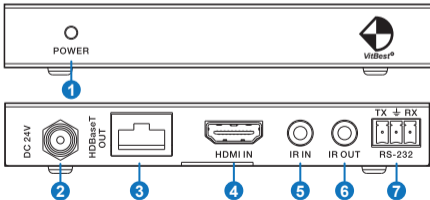

Number	Name	Function description
1	Power	System power indicator.
2	DC 24V	Connect 24V/1A adaptor to AC wall outlet for power supply.
3	HDBaseT Out	Standard HDBaseT output port. Connect HD-BaseT receiver with a UTP cable following the standard of direct interconnection method.
4	HDMI In	Connect to HDMI source device such as Blu-ray or PS4 player.
5	IR IN	Channel 2 IR Receiver. Connect to an IR receiver cable.
6	IR OUT	Channel 1 IR Transmitter. Connect to an IR emitter cable.
7	RS-232	Phoenix jack provide serial port control from transmitter to receiver.
8	Connection Signal Indicator Lamp	<ul style="list-style-type: none"> <li>※ Illuminate: The Transmitter and Receiver are in good connections status.</li> <li>※ Flashing: The Transmitter and Receiver are in poor connections status.</li> <li>※ Dark: The Transmitter and Receiver are not connected.</li> </ul>
9	Data Signal Indicator Lamp	<ul style="list-style-type: none"> <li>※ Illuminate: HDMI signal with HDCP.</li> <li>※ Flashing: HDMI signal without HDCP.</li> <li>※ Dark: No HDMI signal.</li> </ul>

## 5.2 Receiver Panel

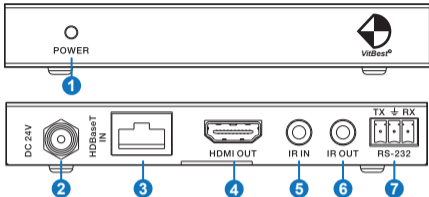


Number	Name	Function description
1	POWER	System power indicator.
2	DC 24V	Connect 24V/1A adaptor to AC wall outlet for power supply.
3	HDBaseT IN	Standard HDBaseT input port. Connect HD-BaseT Transmitter with a UTP cable following the standard of direct interconnection method.
4	HDMI OUT	Connect to the HDTV or monitor HDMI input port.
5	IR IN	Channel 1 IR Receiver. Connect to an IR receiver cable.
6	IR OUT	Channel 2 IR Transmitter. Connect to an IR emitter cable.
7	RS-232:	Phoenix jack provide Serial port control signal from transmitter to receiver.



8	Connection Signal Indicator Lamp	<ul style="list-style-type: none"> <li>※ Illuminate: The Transmitter and Receiver are in good connections status.</li> <li>※ Flashing: The Transmitter and Receiver are in poor connections status.</li> <li>※ Dark: The Transmitter and Receiver are not connected.</li> </ul>
9	Data Signal Indicator Lamp	<ul style="list-style-type: none"> <li>※ Illuminate: HDMI signal with HDCP.</li> <li>※ Flashing: HDMI signal without HDCP.</li> <li>※ Dark: No HDMI signal.</li> </ul>


### ※ Description 1

#### POC (Power over Cable) Application Example

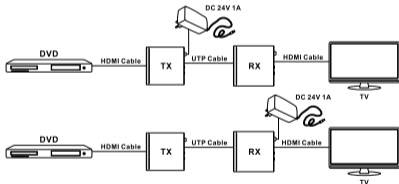



## ※ Description 2

### Bidirectional Infrared control Application Example



## ※ Description 3

### Bidirectional RS232 control Application Example

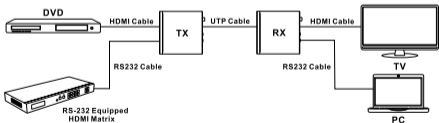

## 6.Connection Diagram

